




FUNCTIONAL CHARACTERISTICS

- 1- Operation speed can be adjusted.
- 2- Slow up and slow down can be adjusted.
- 3- The limit angle can be adjusted.
- 4- Left and right direction can be quickly interchanged.
- 5- The barrier arm can be manually operated in case of power failure.
- 6- 418 frequency learning code anti-copy remote controller.
- 7- Infrared photocell sensor IO signal input function.
- 8- Loop detector and radar IO signal anti-collision signal input function.
- 9- Up, down and stop IO signal input function.
- 10- Counting (fleet) function.
- 11- LED light IO signal output function.
- 12- Traffic light IO signal output function.
- 13- Up and down in place, normally open and normally closed signal output function.
- 14- RS485 communication output function.
- 15- Delay arm drop function.
- 16- Arm auto-reverse function.
- 17- Automatic lifting function when power is off (requires additional power storage module).
- 18- IO port single-key cycle up and down function.
- 19- Loop detector normally open and normally closed function.
- 20- One car and one arm to prevent toll evasion function.
- 21- Anti-collision alarm function (requires additional fee, installation of alarm and sensor).
- 22- Fire linkage signal input function.
- 23- The IO port closes the signal input function.
- 24- 24V storage battery input function.

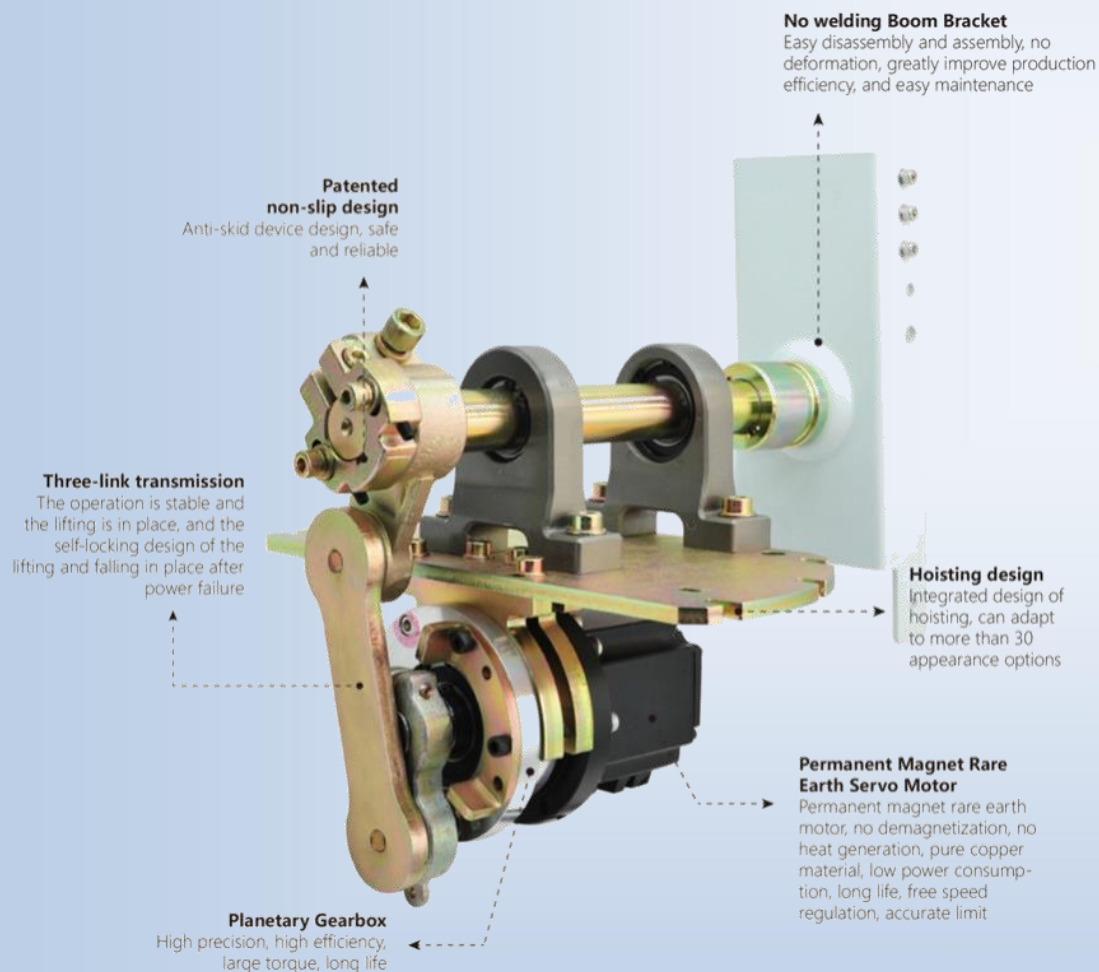


EVT-3AC0630GB
EVT-2AC0230GB

EVT AC SERVO-MOTOR GATE BARRIER SERIES

AC SERVO NON-SPRING SUPER
HIGH-SPEED GATE BARRIER

EVT-3AC0630GB

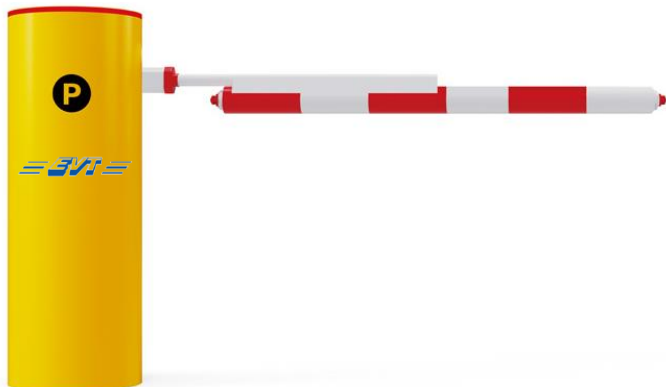


Product Model	EVT-3AC0630GB
Product Description	AC Servo Non-Spring Super High Speed Gate Barrier
Product Size	330X330X950 (mm)
Working Temperature	-35°C~+65°C
Power Supply	DC24V/AC110V/220V 50/60Hz
Running Speed	0.6-3 (s)
Rated Power	750W
Driving Method	Servo Motor
Humidity	≤90%
Remote Control Distance	≤100m (in sunny weather)
Protection Class	IP54
Off-load Motor Speed	5000rpm
Adaptable Boom Length	3 (m)

Eagle Vision Technology Co.

938 N. 200th St., Suite B, Shoreline-Seattle
WA 98133, UNITED STATES
Tel: 1-800-204-4012
www.eaglevisiontech.com
sales@eaglevisiontech.com

AC SERVO NON-SPRING SUPER
HIGH-SPEED GATE BARRIER

EVT-2AC0230GB

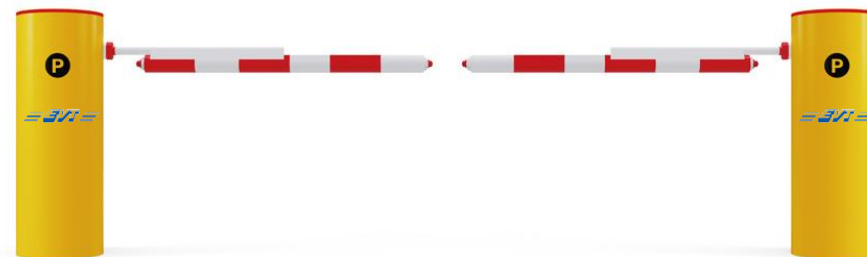

Product Model	EVT-2AC0230GB
Product Description	AC Servo Non-Spring Super High Speed Gate Barrier
Product Size	330X330X950 (mm)
Working Temperature	-35°C~+65°C
Power Supply	DC24V/AC110V/220V 50/60Hz
Running Speed	0.2-3 (s)
Rated Power	750W
Driving Method	Servo Motor
Humidity	≤90%
Remote Control Distance	≤100m (in sunny weather)
Protection Class	IP54
Off-load Motor Speed	5000rpm
Adaptable Boom Length	1.5-2 (m)

Distributed By

