




- Made for non-stop 24/7 monitoring
- VGA, HDMI 2.0, HDMI 1.4, USB and Audio Inputs
- 4K UHD Crystal-Clear Resolution
- Realistic Visual Experience with rich range of colors
- 1200:1 Contrast Ratio, 350cd/m<sup>2</sup> Brightness
- Built-in 7W Speakers
- 178° Horizontal & Vertical Super-Wide Viewing Angles

## EVT-65-4K

4K ULTRA-HD 65-INCH  
LED MONITOR

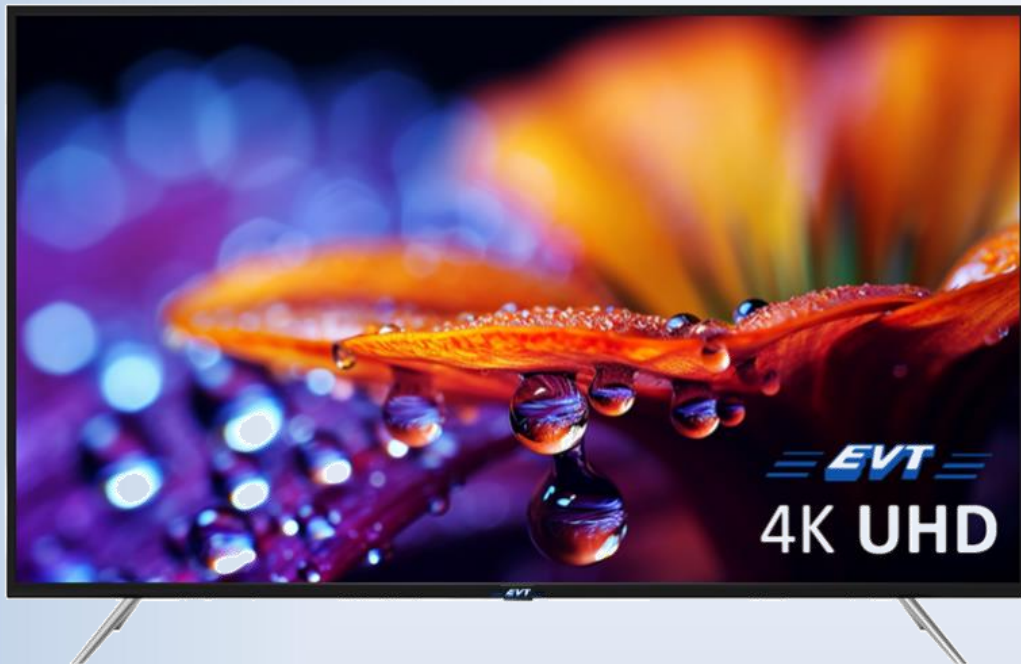

THE LED SPECIALIST



# EVT-65-4K 65-INCH 4K UHD LED MONITOR

## Display

|                   |                          |
|-------------------|--------------------------|
| Size              | 65-Inch                  |
| Resolution        | 3864(H)*2160(V) Ultra HD |
| Aspect Ratio      | 16:9                     |
| Technology        | LED                      |
| Contrast          | 1200:1                   |
| Brightness        | 350cd/m <sup>2</sup>     |
| Color Range       | 1.07G                    |
| Refresh Rate      | 60Hz                     |
| Response Time     | 8ms                      |
| Viewing Angle (H) | 178°                     |
| Viewing Angle (V) | 178°                     |

## Input/output

|             |                                                  |
|-------------|--------------------------------------------------|
| Video Input | HDMI 2.0 x 2, HDMI 1.4 x 1, USB 2.0 x 1, VGA x 1 |
| Audio Input | Audio x 1                                        |
| Output      | 7 (W) Speaker x 2                                |

## General

|                 |                                                  |
|-----------------|--------------------------------------------------|
| Bezel           | 2.9mm                                            |
| VESA            | 300mm x 300mm                                    |
| Net Weight      | 18.6kg                                           |
| Gross Weight    | 24.4kg                                           |
| Dimensions (mm) | 1446.3 (W) x 838.4 (H) x 77.6 (D) "without base" |
| Packaging (mm)  | 1600 (W) x 995 (H) x 174 (D)                     |
| Temperature     | 0°C~40°C                                         |
| Humidity        | 10%~80%                                          |

## Approvals

|                |         |
|----------------|---------|
| Certifications | CE, FCC |
|----------------|---------|

## Accessories

|          |                                         |
|----------|-----------------------------------------|
| Included | Power Cord, Pedestal and Remote Control |
| Optional | Wall-Mount Bracket                      |

## Power

|              |                                      |
|--------------|--------------------------------------|
| Power Supply | AC 100-240V, 2.5A, 50/60Hz           |
| Consumption  | ≤ 0.5W (Standby), 190W (Operational) |

## DIMENSIONS (mm)



All rights reserved. Appearance and specifications are subject to change without prior notice

