


4/8/16/32 Channel 4K Network Video Recorder



System Connection

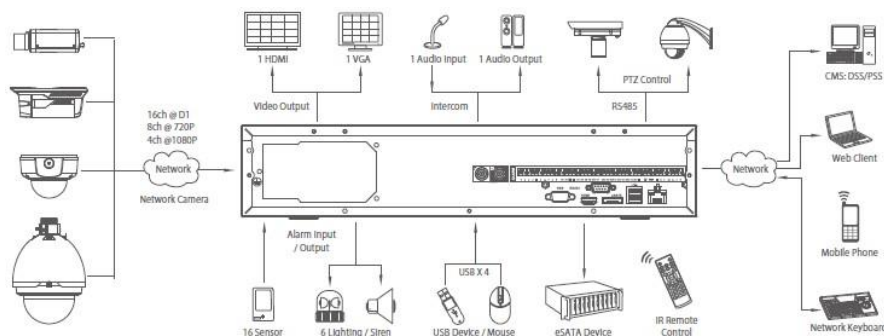

EVT-NVR3208-4K
EVT-NVR3216-4K
EVT-NVR3232-4K

E -NVR3208-4K
V -NVR3216-4K
T -NVR3232-4K

SPECIFICATIONS

FEATURES

- > Up to 4/8/16/32 channel with 12MP/4K
 > H.264/MJPEG dual codec decoding
- > Max 120fps@3840p,
- > HDMI / VGA simultaneous video output
- > All channel synchronous realtime playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotech and etc.
- > ONVIF Version 2.0 conformance
- > 3D intelligent positioning with EVT PTZ camera
- > Support 8 SATA HDDs up to 32TB, 1 eSATA up to 16TB, 4 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

Model		EVT-NVR3208-4K	EVT-NVR3216-4K	EVT-NVR3232-4K
Operation System		Embedded LINUX system		
Image Code Control		Image code quality adjustable, variable bit stream and limited bit stream optional		
Dual Stream		Each channel can set main stream and sub stream		
Video Standard		H.264/H.265 self-adaption		
Monitoring Image Quality		12MP,4K,5MP,3MP, 3840 × 2160 , 1920 × 1080 , 1280 × 1024, 1280 × 720 , 1024 × 768		
Image Motion Image		Each screen can set multiple detection areas and set 6-level sensitivity(IPC Support)		
Recording Playback Quality		Any 1ch/4ch/9ch/16ch playback simultaneously		
Region Cover		Every channel can set 4 cover regions(IPC Support)		
Recording Mode		Support manual, auto, motion detection, alarm trigger record mode		
Backup Way		Support HDD, U-disk, USB mobile HDD, USB DVD-RW, network storage and backup(IPC Support Partial)		
Operation Way		Mouse, keyboard		
Local Login		User name and password		
Recording Storage		Local HDD, network		
External Ports	Video Input	8-16-32ch input, support 4K/5MP/3MP/2MP		
	(mode)	16ch preview mode without smart analyzing function		
		8-16-32ch preview mode support 8ch smart analyzing function		
	Audio Input	According to network video channel number do 1:1network audio input		
	Video Output	2×VGA+2×HDMI		
	Audio Port	1ch RCA input, 1ch RCA output		
	Network Port	2×10M/100M/1000M		
	RS485 Port	Full duplex standard 485 ports		
	USB Port	1×USB3.0, 2×USB 2.0		
	Alarm Input	4-8-16ch		
HDD	Alarm Output	6ch		
	HDD Port	8×SATAPorts, 8 HDDs or 6 HDDs + 1 CD/DVD-RW, Up to 32 TB		
Max Capacity		Each port supports MAX 8TB HDD		
Mobile Surveillance		Support(iPhone, Windows Mobile, BlackBerry, Symbian, Android)smart phone		
Power Supply		ATX110-220V 400W 50-60Hz		
Power consumption		≤50W (without HDD)		
Working Temperature		-10℃~+55℃		
Working Humidity		10%-90%		

EVT
 Eagle Vision Technology

Eagle Vision Technology Co

Hoes Lane, Suite 200 Piscataway, NJ 371
 United States ,08854
 Tel : +1 (732) 377-2035
 www.eaglevisiontech.com
 sales@eaglevisiontech.com



Distributed By