



- Crash rated to ASTM F2656: M50-P1
- Smooth and quiet operation
- Manual or automatic controls
- Cladding or mesh fascia
- Heavy duty 3-Phase motor
- Standard operating speed 250mm/sec




EVT-SWG-24-M50

8M MAX 2-4M/LEAF 3-PHASE
M50 RATED SWING GATE


EVT-SWG-24-M50 8M MAX 2-4M/LEAF 3-PHASE M50 RATED SWING GATE

Specification	
Power Supply	380V-415V 3-Phase + N + E at 50Hz
Motor speed	1400r/min
Output torque	280N.m
Motor power	2200w
Max gate weight	6000kg
Gate speed	0.22m/Sec
Temperature	-45°C~ +65°C
Noise	≤58dB
Motor Dimensions (H x L x W) mm	517 x 389 x 277
Manual Release	Includes a clutch mechanism for manual opening during power failures.
Safety & Protection	Built-in intelligent self-protection to resist overheating and overvoltage.
Crash Rate	ASTM F 2656 M50/P1
Gate height	2400 mm, 2750 mm and 3000 mm (incl. 100 mm ground clearance)
Gate Weight	Approx. 4710 – 6000 kg (depending on gate size)
Lowered foundation	Minimum Foundation depth of 380mm
Finish	Galvanized or zinc primer & Polyester top coat @60μm
Safety Accessories	Photocells, Vehicle Loop Detector, Traffic Light, Flashing Beacon and Audible Alarm

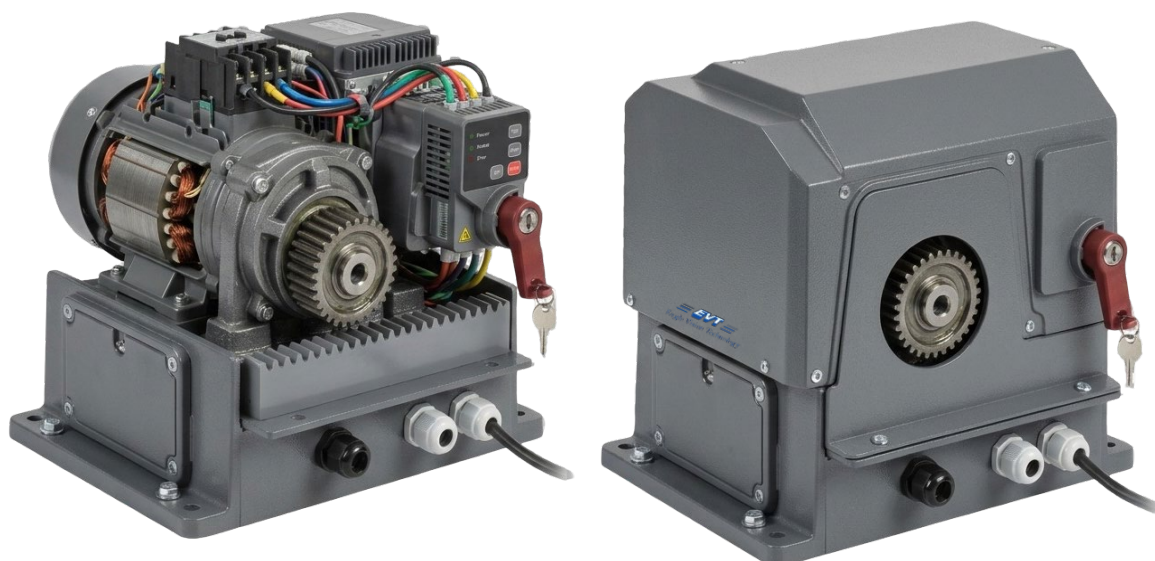



Architectural Drawings – Front View

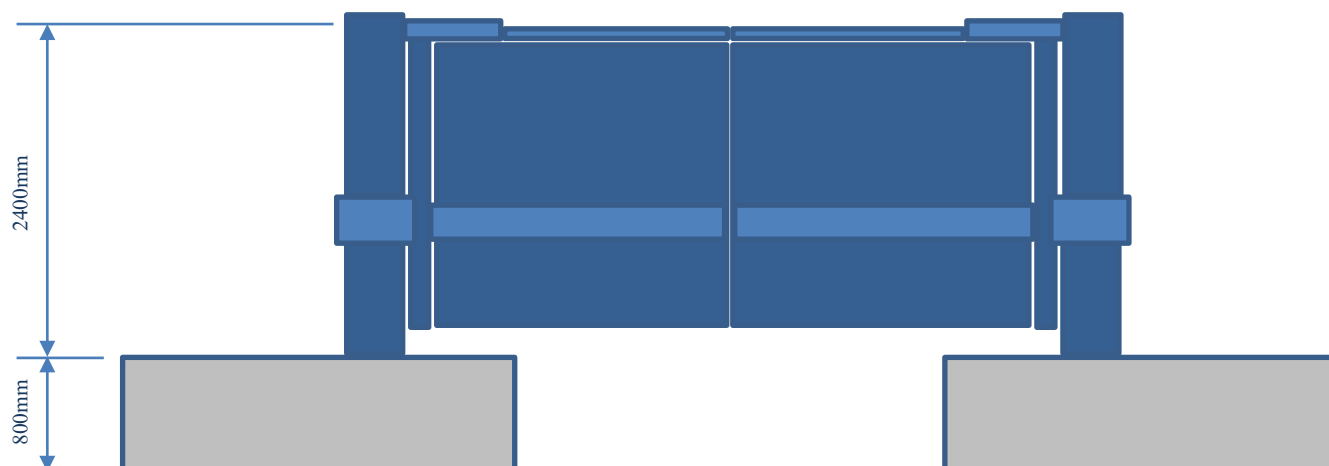

All rights reserved. Appearance and specifications are subject to change without prior notice

Eagle Vision Technology Co.

3949, White Plains Rd, Bronx, New
York NY, 10466, UNITED STATES

Tel: 1-734-210-4263

www.eaglevisiontech.com

sales@eaglevisiontech.com

Distributed By

